



ALAT Uji

Products, Solution, Services


FEP ME 640



Office: Jl. Radin Inten II No. 62 Duren Sawit,
Jakarta 13440 - Indonesia
Workshop: Jl. Pahlawan Revolusi No. 22B,
Jakarta 13430 - Indonesia
Phone: 021-8690 6777 (Hunting)
Mobile: +62 816 1740 8925
Fax: 021-8690 6771

THE REAL COST-EFFECTIVE CHECKPOINT CHOICE

- Superior B&W and color image quality
- Designed to show threat items and organic materials inside a hand-bag
- Ideal for the aviation market
- The perfect solution for best performance
- Ideal to scan items of any shape, thanks to the brand-new photocell bar
- Features state-of-the-art detection technology and PC data management software
- Advanced service software
- Network ready
- TIP complying with EU 23/2008
- User friendly

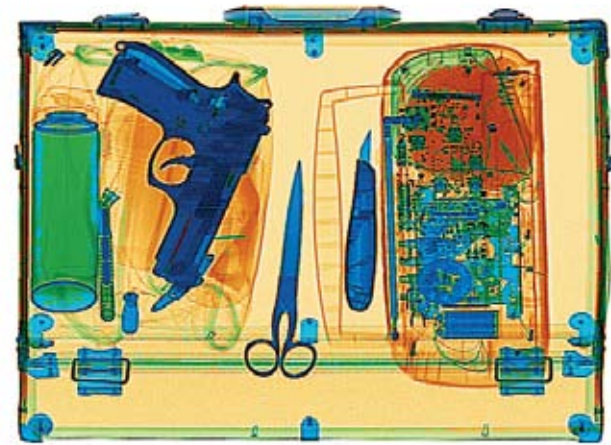

Color image: Materials with different Z

A NEW IMAGE SENSATION

- Completely renewed imaging software
- First-class penetration and resolution
- Real time "On-the-fly" image processing at 24-bit
- Automatic color coding of materials with different Z (organic, inorganic, metallic)




Black and white image: Details and definition

MORE POWER TO THE OPERATING SYSTEM


- Intuitive operator interface
- Multi-level access
- Multi-tasking capabilities
- New digital archiving system
- High interoperability
- Client-server platform
- Real-time operating system functions



A TRUE NETWORK EXPERIENCE

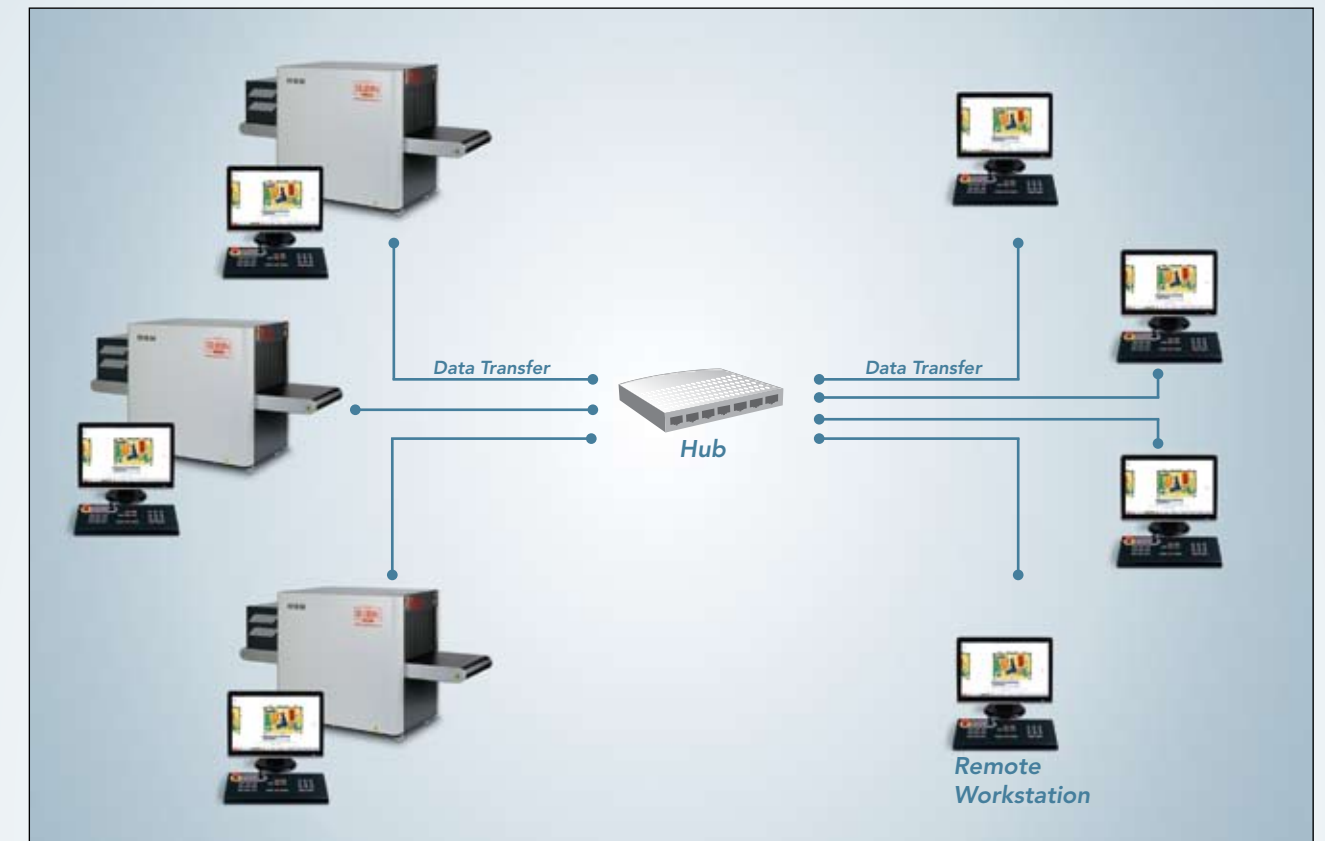

- Data sharing
- TIP reports and configurations accessible from a supervisor station
- Central archive of all work sessions and images acquired on the network (networking AIMS)
- Management of the network operating settings from a remote supervisor workstation
- Further screening with remote operator workstation(s)
- Multilevel inspection architecture
- Fully compatible with all Gilardoni equipment

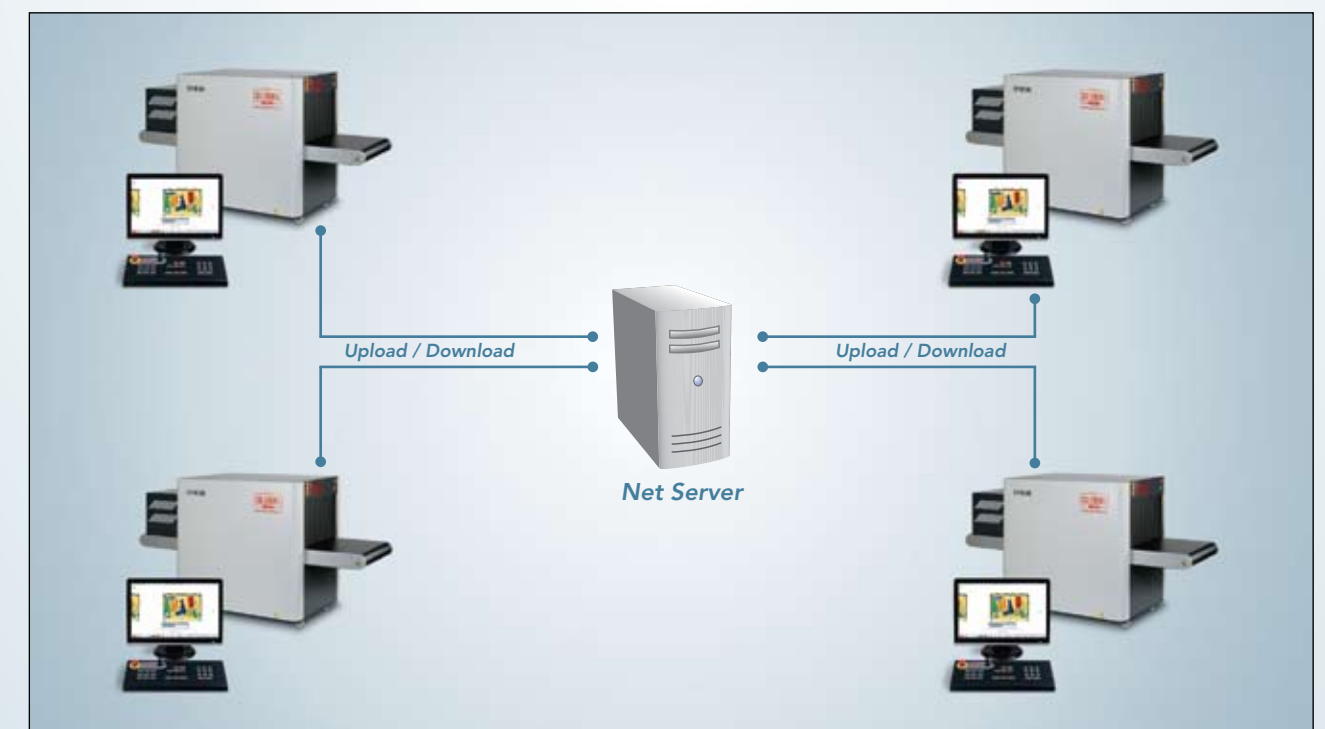

TECHNICAL SPECIFICATIONS

Inspection unit

- Dimensions: 2280mm (L) x 905mm (W) x 1255mm (H)
- Weight: 450kg
- Inspection tunnel size: 606mm (W) x 405mm (H)
- Conveyor belt height: 680mm (adjustable)
- Belt speed: 0.2m/s
- Maximum bag weight: 165kg
- 1 monitor LCD widescreen
- Power supply: Monophase 230VAC or 110VAC +/- 10%
- Frequency: 50/60Hz +/- 3Hz
- Power absorption: $\leq 1.5\text{kVA}$
- Duty cycle: 100%

X-Ray generator

- High frequency monoblock
- Tension at x-ray tube: 150kV
- Current at x-ray tube: 0.5mA
- Beam Orientation: Diagonal upwards

Detection characteristics

- Resolution*: 40 AWG guaranteed, 41 AWG typical
- Penetration*: 32mm steel guaranteed, 34mm steel typical
- Detectors: Two "L"-shaped rows of photodiodes

Environmental compliance

- Operational temperatures: 0°C – 40°C
- Storage temperature: -20°C – +60°C
- Humidity: 95% without condensation
- Noise level: < 60dB (A)

Standard image enhancement features

- Organic/inorganic materials discrimination (low Z, medium Z and high Z)

- Continuous contrast variation
- Continuous variation of penetration levels
- Reverse Image
- Variable edge enhancement
- Energy stripping
- Pseudo colours
- Continuous Zoom x2 up to x64 & Rotozoom
- All features available "on the fly"

Advanced functions

- Density alarm (adjustable threshold)
- Image storage on removable devices
- Off-line post-processing on work sessions


Health and Safety

- The system fully meets the applicable international regulations for X-Ray equipment
- Leakage dose at 10cm: < 1.0 μSv / hour (0.1mR/h)
- Film safety: guaranteed up to ISO 1600/33 DIN

Options

- ADS
- TIP
- NetServer & TIPNet
- Digital Image Archiving (AIMS)
- AIMS Networking
- Modular Roller Tables
- Monitor Enclosure
- Foldable roller tables
- 2nd level remote display workstation(s)
- UPS
- Smart-card login

REFERENCE REGULATION: EC, IEC, TSA, STAC, DfT, ENAC

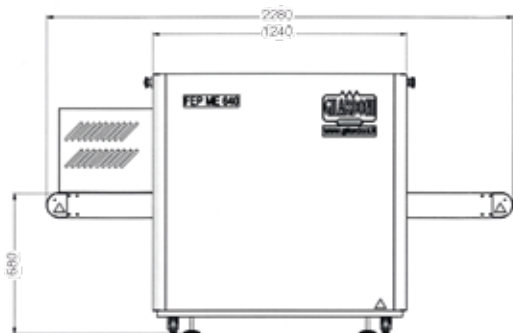

* Tested with Gilardoni S.p.A. proprietary copper wires and steel stepwedge



Dimensions in mm